

The Slate Line Vent Range



Our Slate Line range comprises three different products allowing for discreet ventilation of slated roofs both natural and man-made to suit all budgets.


All three products are designed around an injection moulded grille that combines two functions, to act as a 4mm insect screen and as a baffle against wind driven rain.

A catchment tray, bonded to the top cover, discharges any water entering the grille via channels in the lower section of the vent to the slates below. Each unit has an airflow capacity of 10,000mm²

Slate Line Smooth

The Slate Line Smooth range is manufactured in High Impact polystyrene. A high graphite content ensures chemical and physical stability in the presence of high UV levels.

The product is ideally suited to fibre cement slates but can equally be used with Natural Slate if desired. Available sizes from 400mm x 250mm up to 600mm x 300mm, in Blue/Black as a standard, but can be produced in any colour to suit.

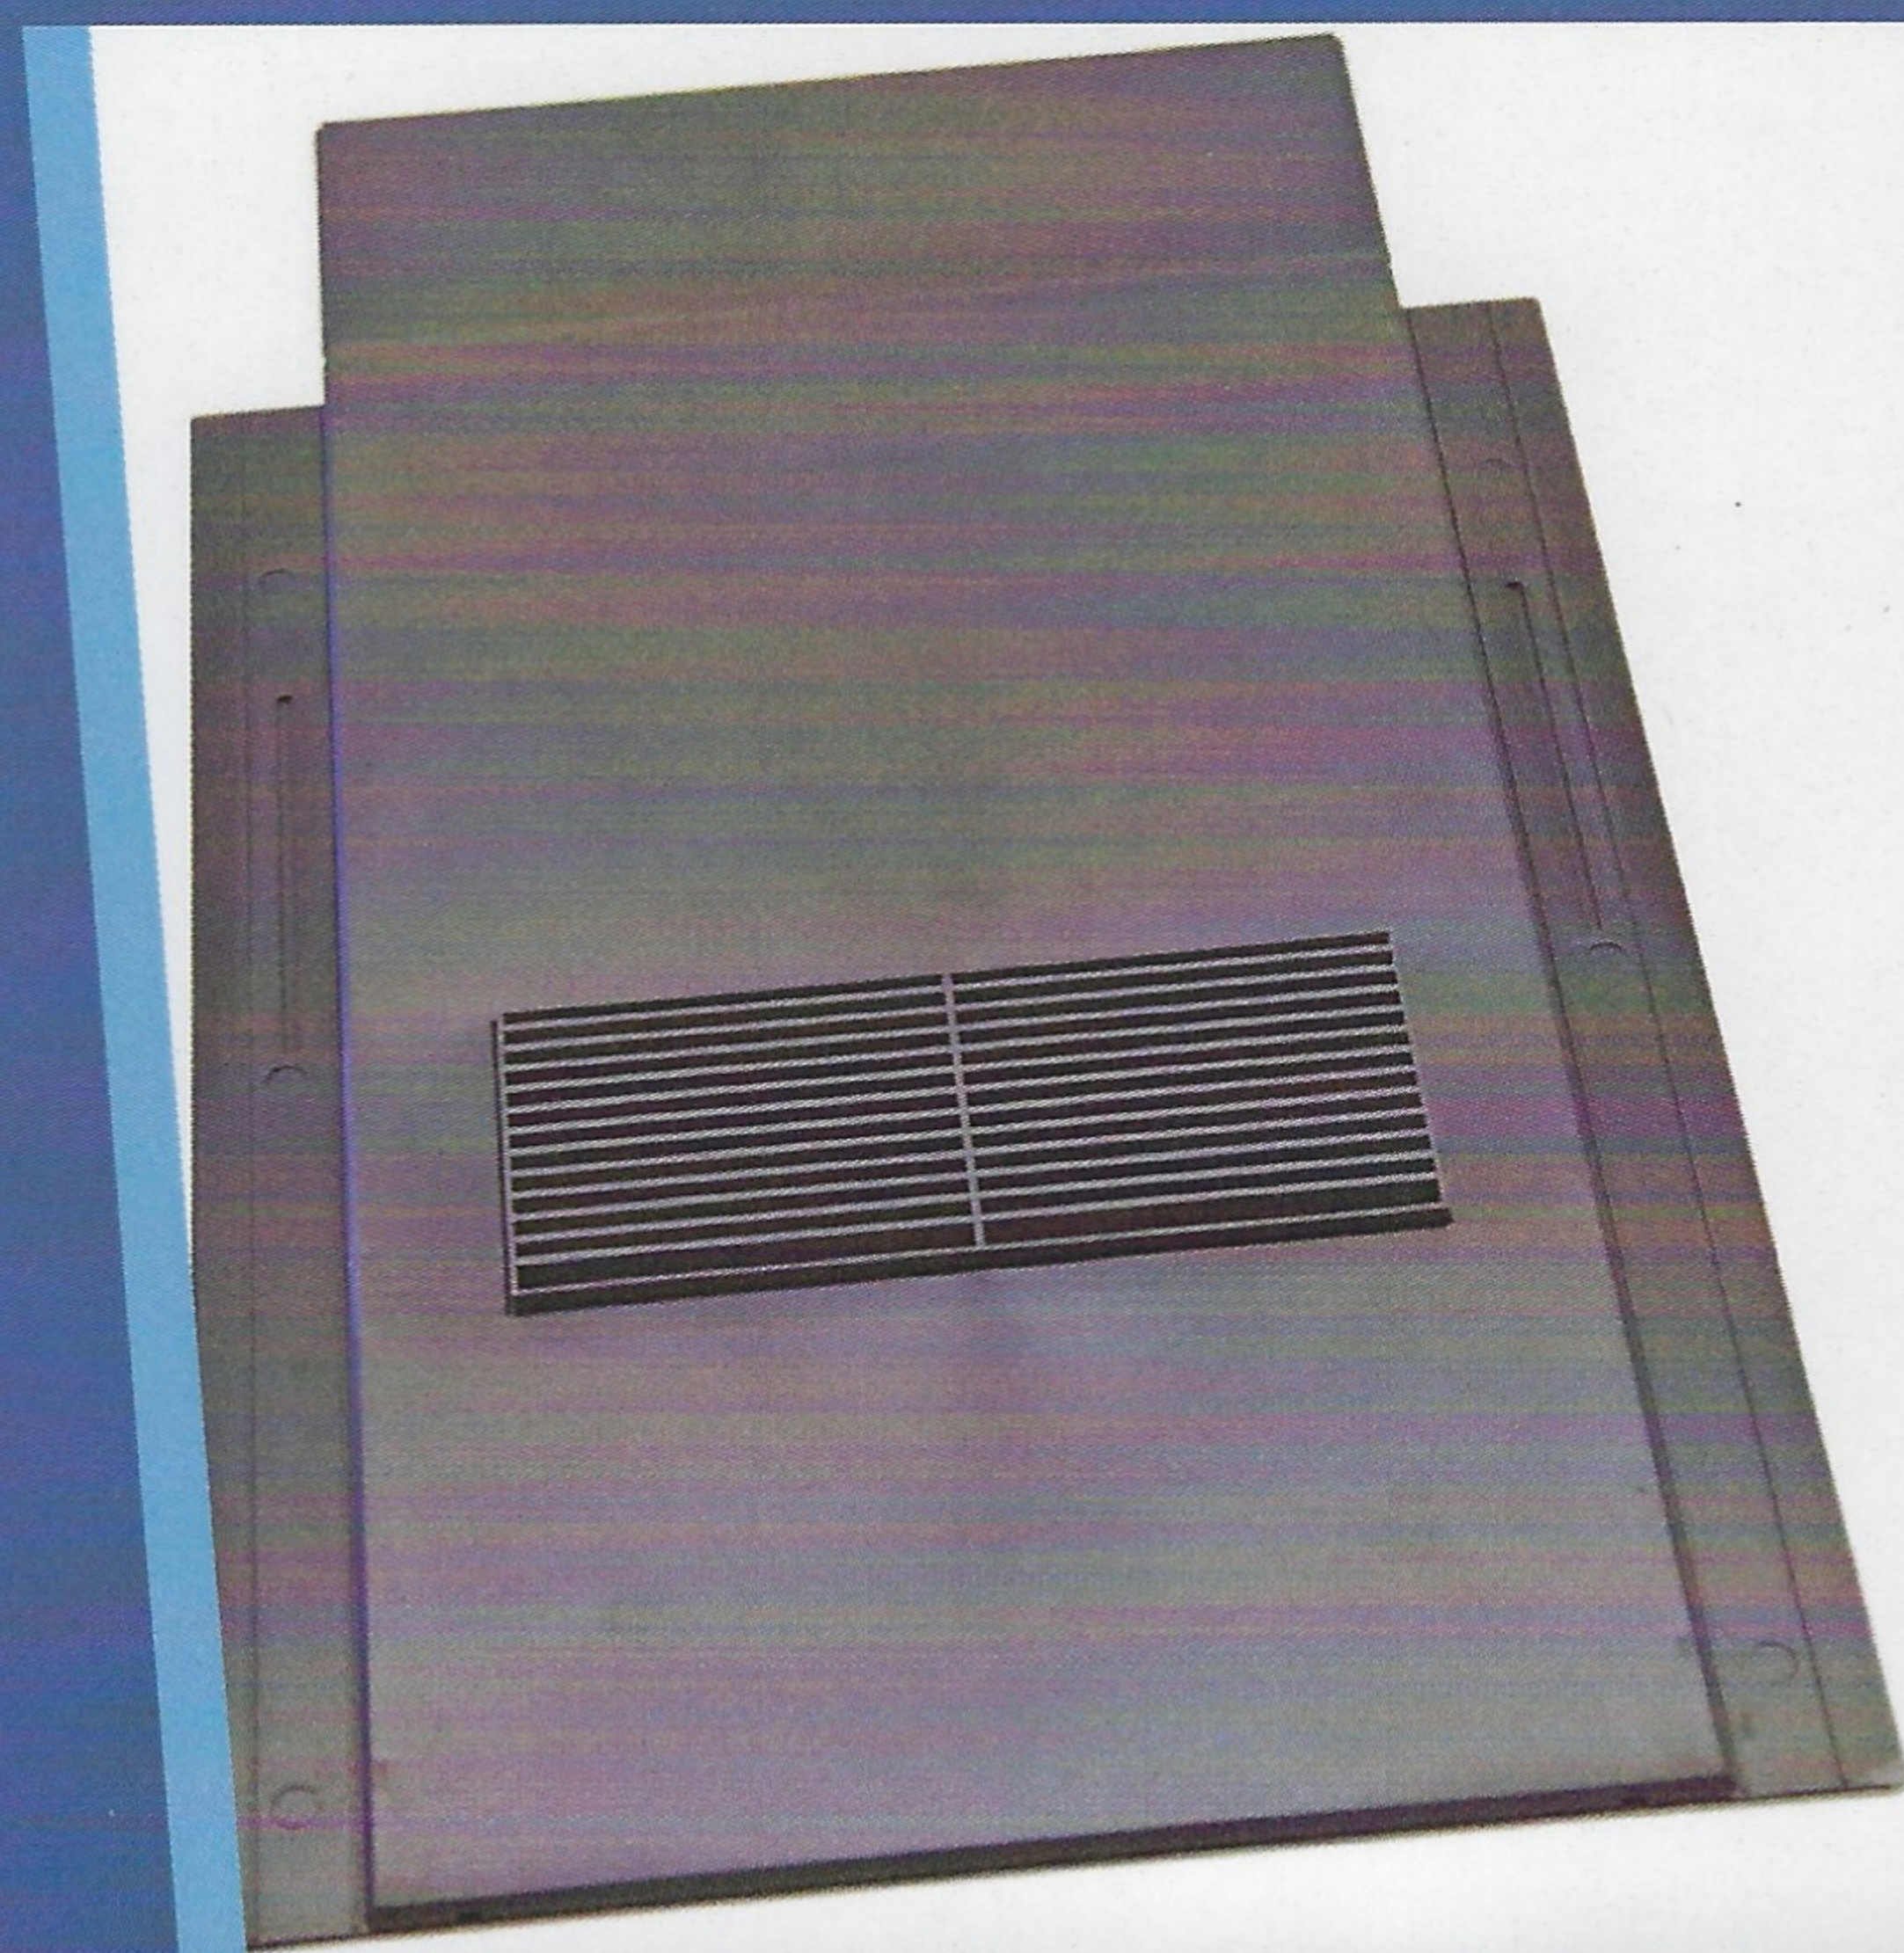

Slate Line Hybrid



The Slate Line Hybrid uses the same manufacturing process but with the addition of a Natural Slate on the visible part of the vent, giving the appearance of a full slate when in situ.

Suitable for all types of Natural Slate.
Available in all sizes from 400mm x 250mm up to 600mm x 300mm



Slate Line Natural

The Slate Line Natural is a bespoke product, whereby a natural slate acts as the upper cover with the catchment tray chemically bonded to it.

A minimum width of 300mm applies allowing the following formats: 600mm x 300mm, 500mm x 300mm and 400mm x 300mm. When used with slates of less than 300mm width the adjacent slates require trimming along their length to maintain perps.

