



Graver Technologies

Filtration | Separation | Purification

## QXL™ Polypropylene Filter Series

### Absolute Rated Filtration for Inks, Slurries and Coatings

With its extra-loft, extra-life depth filter configuration, the QXL is designed for the filtration of industrial solutions containing agglomerated particles and gels or with high viscosity. Consistent absolute retention performance is achieved throughout the pleated, serialized microfiber matrix. The state-of-the-art optimized structure provides significantly higher flow rates and throughputs than cylindrical melt blown filters.

### Filter Features–Benefits

- Hybrid pleated depth construction combines graded pore structure with high surface area.
- Constructed entirely of polypropylene – Compatible with a broad range of solutions and chemicals
- Optimized pleat configuration – Provides the ideal combination of retention, flow rate and throughput
- Excellent gel and agglomerated particle retention reduces defects
- Available in common end cap configurations – Retrofits easily into most filter housings
- FDA listed materials of construction
- Meets USP Class VI Biological test for plastics


### Filter Specifications

#### Materials

Media:	Polypropylene
Core,Cage, End Caps:	Polypropylene
Gaskets/O-Rings:	Silicone, Viton, EPDM, Buna, Teflon encapsulated Viton (O-Rings only)
Micron Ratings:	0.45, 0.5, 1, 3, 5, 10, 20, 40 μm

#### Dimensions and Operating Parameters

Typical nominal lengths:	9.75", 10", 20", 30", 40" 24.8, 25.4, 50.8, 76.2, 101.6 cm
Outside Diameter:	2.7" (6.86 cm)
Inside Diameter:	1.1" (2.79 cm)
Maximum Operating Temperature:	176°F (80°C)
Maximum Differential Pressure:	75 psid @ 70°F (5.2 bar @ 21°C) 40 psid @ 176°F (2.8 bar @ 80°C)
Maximum Reverse Differential Pressure:	35 psid @ 80°F (2.4 bar @ 27°C)
Recommended Change-out pressure:	35 psid (2.43 bar)
Sterilization:	Cartridges may be autoclaved for 30 minutes at 250°F (121°C) under no end load conditions. May be in-line sanitized with 185°F (85°C) hot water– do not exceed 3 psid.

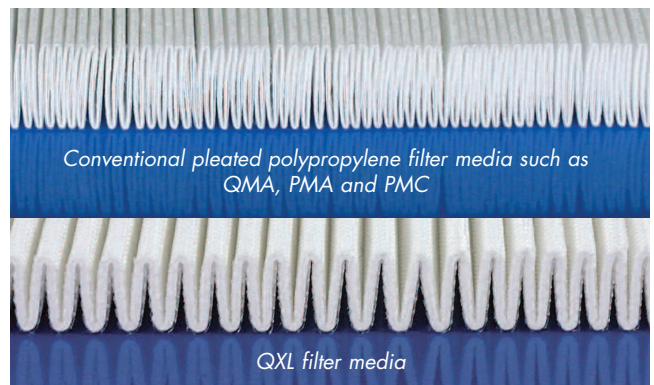

### Applications

- Inks
- CMP P-O-U and bulk slurries
- Adhesives
- Paints
- Beverages
- Coatings


### Filter Removal Efficiency

Beta Ratio Efficiency	Beta 1000	Beta 100	Beta 50
0.45 micron	99.9%	99%	98%
0.5 micron	0.45	0.3	0.2
1 micron	0.65	0.45	0.3
3 microns	1.5	0.8	0.6
5 microns	3	2	1
10 microns	5	4	3
20 microns	10	8	7
40 microns	20	19	17
	40	35	25

## QXL Nomenclature Information

<p style="text-align: center;"><b>QXL</b></p> <p><b>Filter Type</b> QXL Series Filters</p>	<p style="text-align: center;"><b>5</b></p> <p style="text-align: center;"><b>Retention Rating (microns)</b></p> <p style="text-align: center;">0.45* 0.5** 1 3 5 10 20 40</p> <p>* Special CMP slurry formulation. ** Special ink formulation.</p>	<p style="text-align: center;"><b>-10</b></p> <p style="text-align: center;"><b>Nominal Length (inches)</b></p> <p style="text-align: center;">-9.75 -10 -20 -30 -40</p>	<p style="text-align: center;"><b>P8</b></p> <p style="text-align: center;"><b>End Configuration</b></p> <p><b>P</b> Double Open End <b>P2</b> 226/Flat Single Open End <b>P3</b> 222/Flat Single Open End <b>P7</b> 226/Fin Single Open End <b>P8</b> 222/Fin Single Open End <b>AM</b> Single open end, internal O-Ring</p>
		<p style="text-align: center;"><b>S</b></p> <p style="text-align: center;"><b>Gasket or O-Ring</b></p> <p><b>S</b> Silicone <b>B</b> Buna-N <b>E</b> EPDM <b>V</b> Viton <b>T</b> Teflon encap. Viton (O-Rings only)</p>	

Example: QXL 5-10 P8S

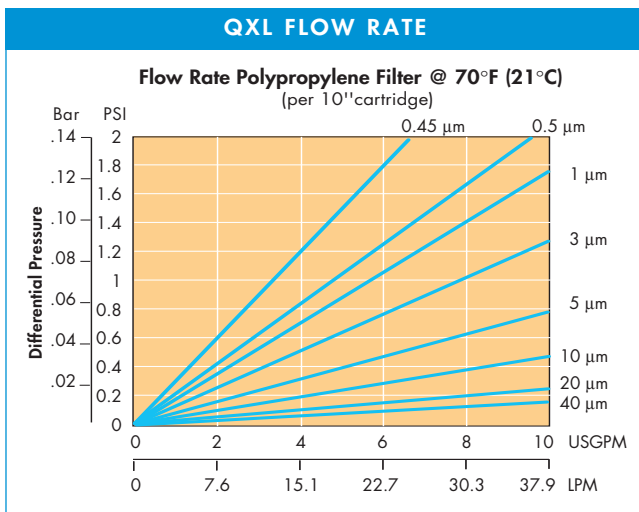

### For more information

Graver Technologies Customer Service: **1-888-353-0303**

Technical Support: **1-800-510-0932**

E-mail us at [info@gravertech.com](mailto:info@gravertech.com)

Graver Technologies Europe (UK): **+44-1424-777791**

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.  
QXL is a trademark of Graver Technologies, LLC.

DISTRIBUTED BY:



200 Lake Drive  
Glasgow,  
DE 19702 U.S.A.

302- 731-1700  
800- 249-1990  
Fax 302-369-0938

e-mail: [info@gravertech.com](mailto:info@gravertech.com)  
web site: [www.gravertech.com](http://www.gravertech.com)

